


FEMALE CONNECTOR

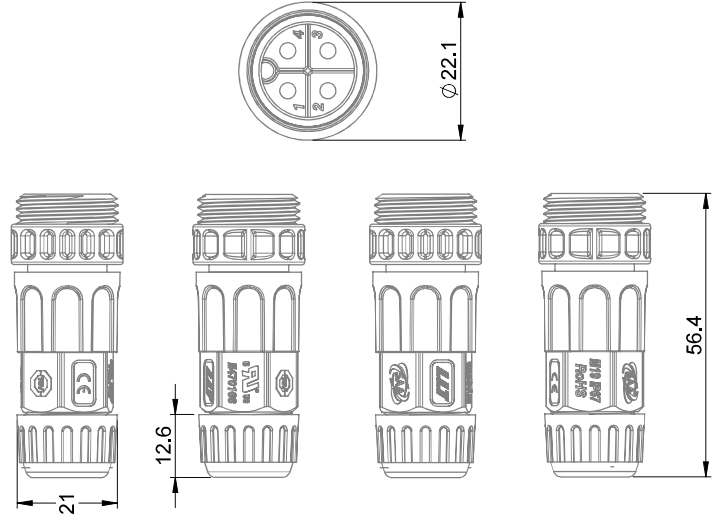

MALE CONNECTOR

- Notes:
- Kit contains 1x Male & 1x Female connector
  - Vendor Kit P/N: LLT-M19CS04  
 Male connector: LLT-M19-20004M1062  
 Female connector: LLT-M19-20004F1052
  - Connectors IP67 when connected
  - Supplied with Gasket: Nominal ID  $\varnothing$  7.8mm
  - Suitable for cable OD  $\varnothing$  6.5-7.8mm
  - Vendor data:
    - Operating Temp: -40 to 105°C
    - Waterproof level: IP67
    - Mechanical Life: 3000 mating cycles
    - Max Current: 25A (subject to connected wire Gauge size)
    - Max size gauge: 14AWG

Dimensions used for reference only. Not for inspection checks.

		TITLE: <b>AUTOMATE   4pin Waterproof connector</b> PART NUMBER: <b>MT03-0603-050002</b>	
		DRAWING NUMBER: <b>MT03-0603-050002</b>	
DRAWN:	D.Chua	25 Nov 2020	
CHECKED:	A.Guerra	25 Nov 2020	
APPROVED:	A.Guerra	25 Nov 2020	
TOLERANCE: 0 < 20 ± 0.10 20 < 40 ± 0.20 40 < 100 ± 0.30 (UNLESS OTHERWISE SPECIFIED)			
MATERIAL: - FINISH: - COLOUR: <b>BLACK</b>		UNSPECIFIED RADIUS: 0.5mm	
WEIGHT(g): <b>45</b>		DO NOT SCALE	
© 2018 ROLLEASE ACMEDA		DIMENSIONS IN MILLIMETERS	
		SCALE: 1:1 SIZE: <b>A3</b> REV: <b>01</b>	

PROPRIETARY & CONFIDENTIAL. THIS DRAWING IS THE SOLE PROPERTY OF ROLLEASE ACMEDA. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF ROLLEASE ACMEDA IS PROHIBITED.