

Easy Spring Air

Submittal Check Sheet

Cordless Operated Contract Series Roller Shades

Date: _____

Fabric Style: _____

Fabric Color / Number: _____

Fabric Openness: _____

All fabric options and data sheets are available at texstyle.com

Project Name: _____

Project Location: _____

Dealer/Installer: _____

Architect: _____

General Contractor: _____

Determine if application is appropriate for shade size


Make sure shades are between 16" and 120" in width

Make sure shade height is less than 120" (3 meters)

Select Hardware Color


White

Black



Select Fabric Orientation on the Roll

Window-Side (Standard)



Room-Side (Waterfall)

Regular (Standard) _____

Waterfall (Standard) _____

Dual Roll Orientation Specify:

Light Filtering(LF) _____ Black out(BO) _____


Link for other options on Child Safety

rolleaseacmeda.com/us/child-safety


Select Weightbar (Bottom Hem Bar)



Sealed Internal



D30 Silent



Fabric Wrapped



Select Mounting Hardware System

Open Roll

3" Fascia

4" Fascia

5" Fascia

Mounting Rail

Cassette 110

5"x5" Recessed Headbox with bottom closure

6"x6" Recessed Headbox with bottom closure

7"x9" Recessed Headbox with bottom closure

Tile Lip on Headbox

(See page 4 for diagram and specific bracket sizes for each option)

Select Additional Options

Headbox Bottom Closure

Bracket Covers

Side Channels for Blackout (Edge)

Pocket "I" Wall Clip


Pocket "L" Clip with Tile Lip

Select Accessories

Bottom Hem Bar Handle + Pull Stick

2-4ft telescopic extension

(for raising and lowering)



Submittal Check Sheet Specifications

1. Easy Spring Air Control System: Tempered steel helical torsion spring of size and capacity to accomplish the lift requirements of size and fabric weight. A height limiter is an integral component for setting top or bottom limits for deployment of the shade panel. Standard 1-1/2" overall diameter. Adjuster wheels regulate spring tension to achieve balance and allow for minimal operating force. Manually raise and lower shade to desired height by applying minimum pressure to hem-bar of shade panel.
2. Mounting Brackets and Hardware: Manufacturer's standard powder-coated or zinc-plated, cold-rolled steel universal brackets. Universal dual shade brackets available for two-shade applications. Linking brackets available for multiple shade band applications. Idle side brackets have bearings for extended life and ease of use.
3. Chain Safety: Must comply with ANSI/WCMA A100.1-2022 (Safety Standard of Window Covering Products)
4. Spring-loaded Idler Pin: UV Stabilized, self-lubricating Nylon outside sleeve and center spring-loaded shaft. The idler bracket has bearings on which the roller tube rides ensuring smooth, wear-resistant operation and ease of installation.
5. Roller Tube: Extruded Aluminum shade roller tube of uniform diameter and varying wall thickness required (for uniform aesthetic) to support shade

fabric without excessive deflection, with engineered wall and ribs to lock the clutch and idle end-plug into place, providing strength and durability. Extruded tube parameters to be determined by Manufacturer for each shade's size, weight, and fabric requirement.

6. Fabric attachment to tube: Provide for positive mechanical attachment to tube by: LSE (Low Stress Energy) double-sided adhesive tape to secure the fabric without having to remove the shade roller from the shade brackets. Adhesive attachment affords minor lateral adjustments to edge clearance dimensions. Fabric wrap of 2 1/2 to 3 times the circumference of the roller tube required for proper tension of fabric-to-tube.
7. Shade Cloth Fabric: Inherently anti-static, flame-retardant, fade and stain resistant, light-filtering, room-darkening, or blackout fabrics as selected from Textile, a division of Rollease Acmeda. Choose light-filtering or room-darkening fabrics from Manufacturer's available product offering.

Full specifications available upon request from:

contract@rolleaseacmeda.com

(Some options are not available with all hardware choices go to www.rolleaseacmedacontract.com for more details)

To speak with someone, call 1-800-552-5100

System Options




Side Channels



Fascia



AP Ceiling Pocket

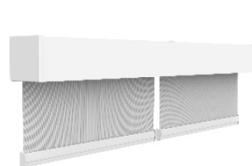

Link System




Dual Roll




Cassette 110


Submittal Check Sheet Hardware Dimensions

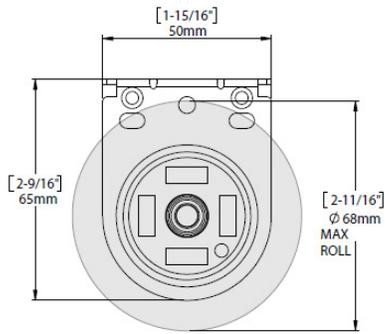


Open Roll LX Bearing Driven Bracket

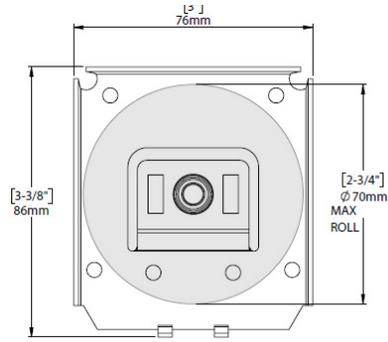



3" Fascia Bearing Driven Bracket

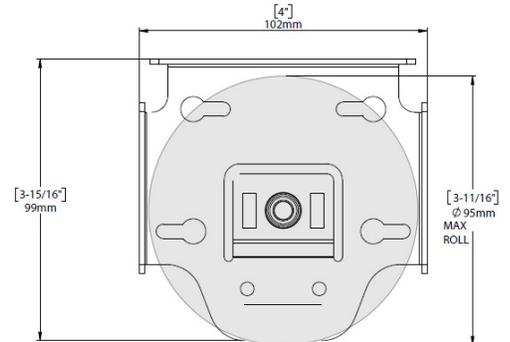


4" Fascia Bearing Driven Bracket

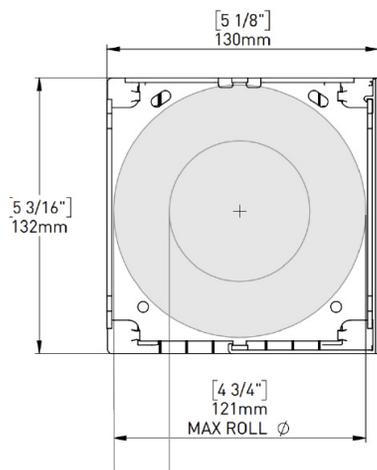


5" Fascia Bracket with Idler Bearings
Single or Dual Roll

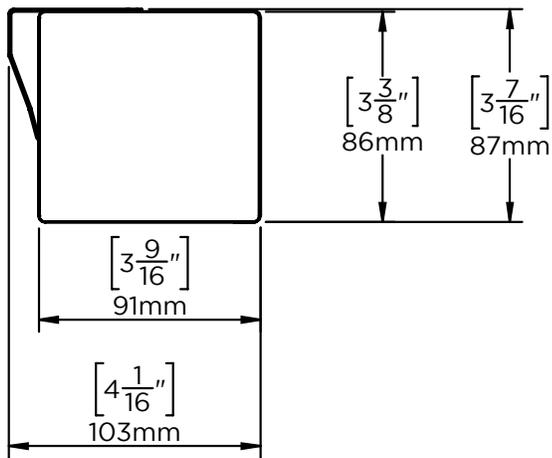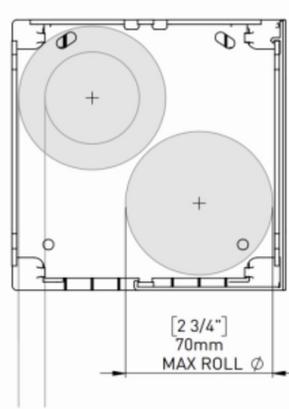

Cassette 110

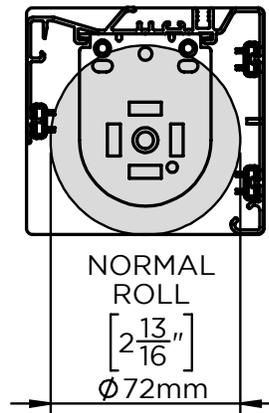


NORMAL ROLL
[2 13/16]
72mm

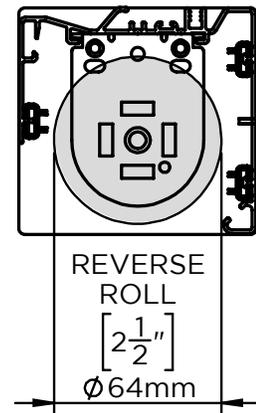


REVERSE ROLL
[2 1/2]
64mm

Headbox Dimensions

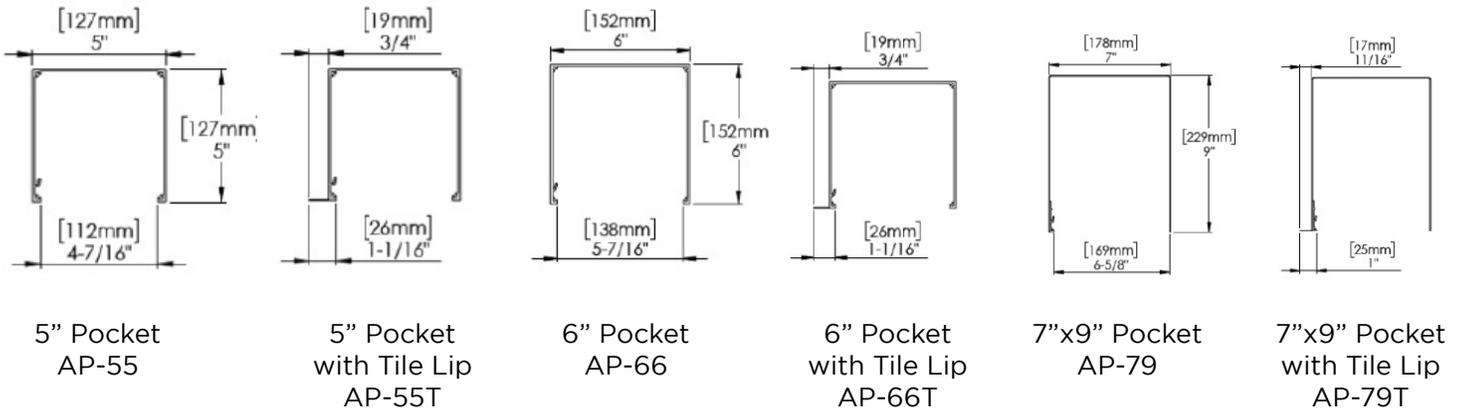

Maximum Roll Diameter

Single Shades

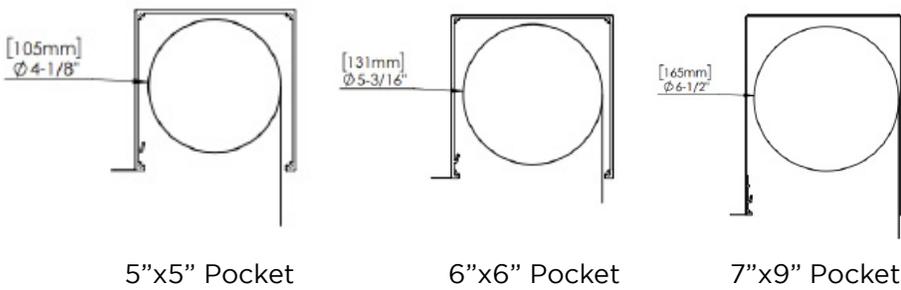

Dual Shades

